


TrueSafe®

Push Button Style Safety IV Catheter



SPECIFICATIONS

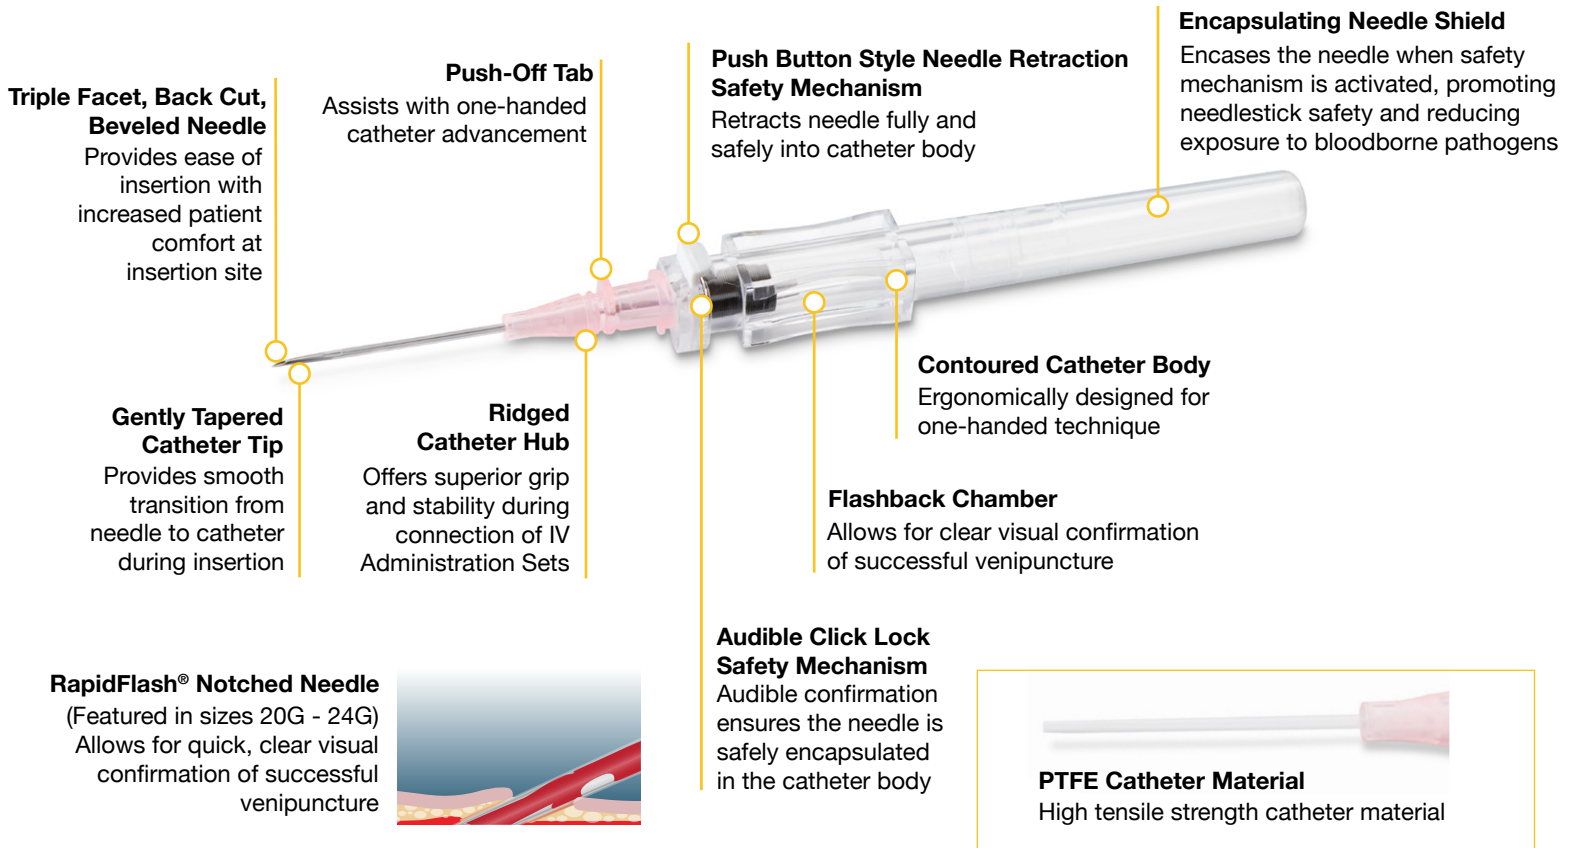

- PTFE catheter material
- Push button style needle retraction
- Notched needle (sizes 20g - 24g)
- Ground stainless-steel needle
- Straight hub
- Disposable
- Not made with natural rubber latex
- Not made with DEHP
- Non-pyrogenic
- ISO compliant color coding
- Needlestick Safety and Prevention Act (NSPA) of 2000 compliant
- Radiopaque


MEDSOURCE

www.medsourcelabs.com

Item #	Gauge and Length	Catheter ID (mm)	Catheter OD (mm)	Gravity Flow Rate (mL/min)	UOM
MS-84414	14G x 1.75"	1.6 mm	2.1 mm	297 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-84416	16G x 1.77"	1.38 mm	1.8 mm	220 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-84418	18G x 1.88"	0.95 mm	1.3 mm	94 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-844182	18G x 1.16"	0.95 mm	1.3 mm	94 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-844202	20G x 1.88"	0.78 mm	1.1 mm	61 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-84420	20G x 1.16"	0.78 mm	1.1 mm	61 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-844203	20G x 1"	0.78 mm	1.1 mm	61 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-84422	22G x 1"	0.62 mm	0.9 mm	36 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-84424	24G x 0.75"	0.49 mm	0.7 mm	20 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS

TrueSafe Comfort[®]

Push Button Style Safety IV Catheter

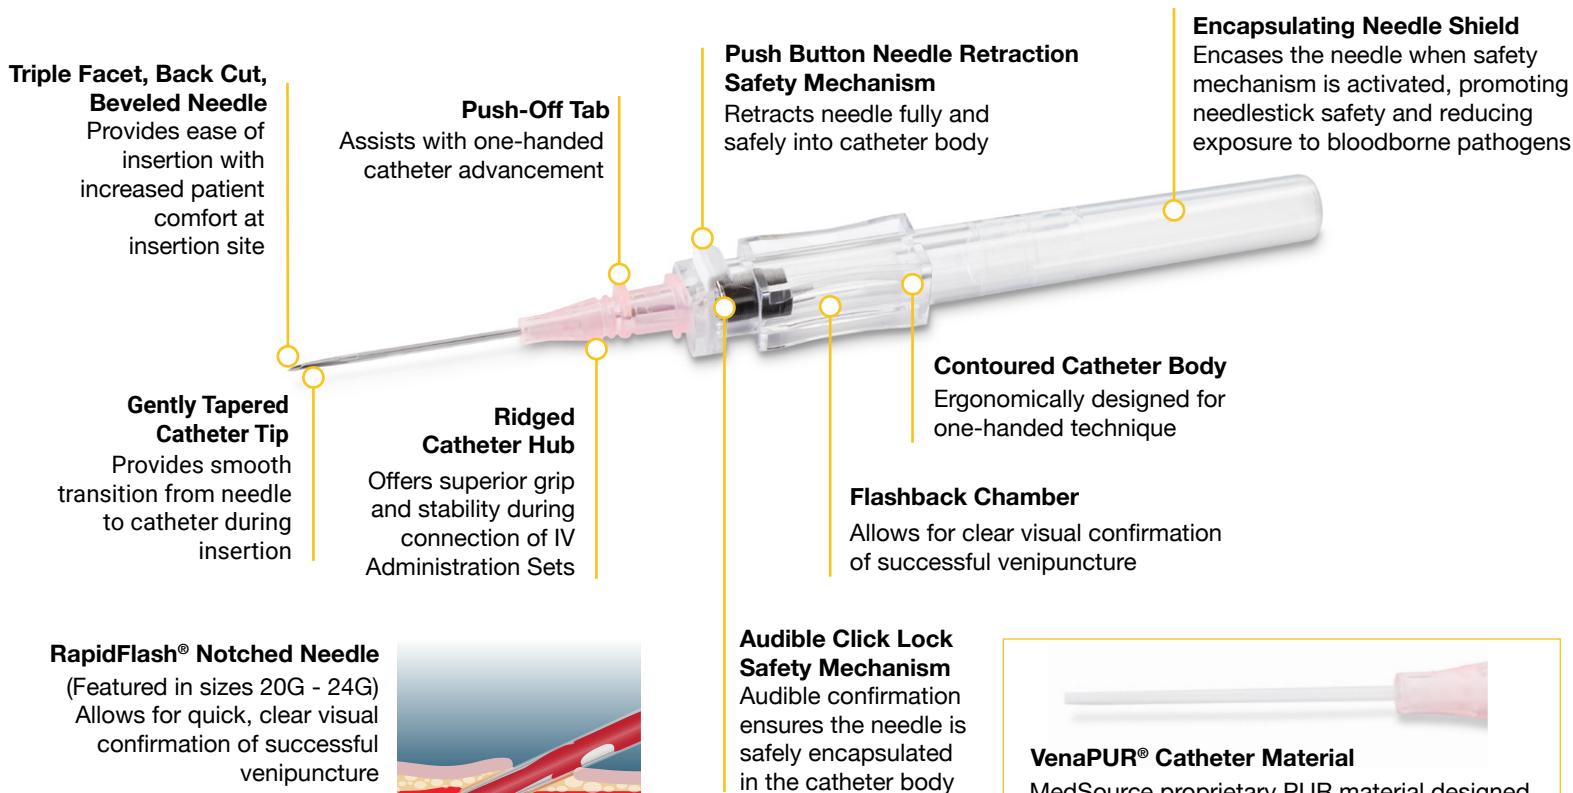

SPECIFICATIONS

- VenaPUR[®] catheter material
- Push button style needle retraction
- Notched needle (sizes 20g - 24g)
- Ground stainless-steel needle
- Straight hub
- Disposable
- Not made with natural rubber latex
- Not made with DEHP
- Radiopaque
- Non-pyrogenic
- ISO compliant color coding
- Needlestick Safety and Prevention Act (NSPA of 2000 compliant)



www.medsourcelabs.com

Item #	Gauge and Length	Catheter ID (mm)	Catheter OD (mm)	Gravity Flow Rate (mL/min)	UOM
● MS-84314	14G x 1.75"	1.6 mm	2.1 mm	297 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-84316	16G x 1.77"	1.38 mm	1.8 mm	220 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-843182	18G x 1.16"	0.95 mm	1.3 mm	94 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-84318	18G x 1.88"	0.95 mm	1.3 mm	94 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-84320	20G x 1.88"	0.78 mm	1.1 mm	61 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-843202	20G x 1.16"	0.78 mm	1.1 mm	61 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-843203	20G x 1"	0.78 mm	1.1 mm	61 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-84322	22G x 1"	0.62 mm	0.9 mm	36 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-84324	24G x 0.75"	0.49 mm	0.7 mm	20 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-843242	24G x 0.56"	0.49 mm	0.7 mm	20 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-84326	24G x 0.56"	0.4 mm	0.6 mm	11 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
● MS-843262	24G x 0.75"	0.4 mm	0.6 mm	11 mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS