




SPECIFICATIONS

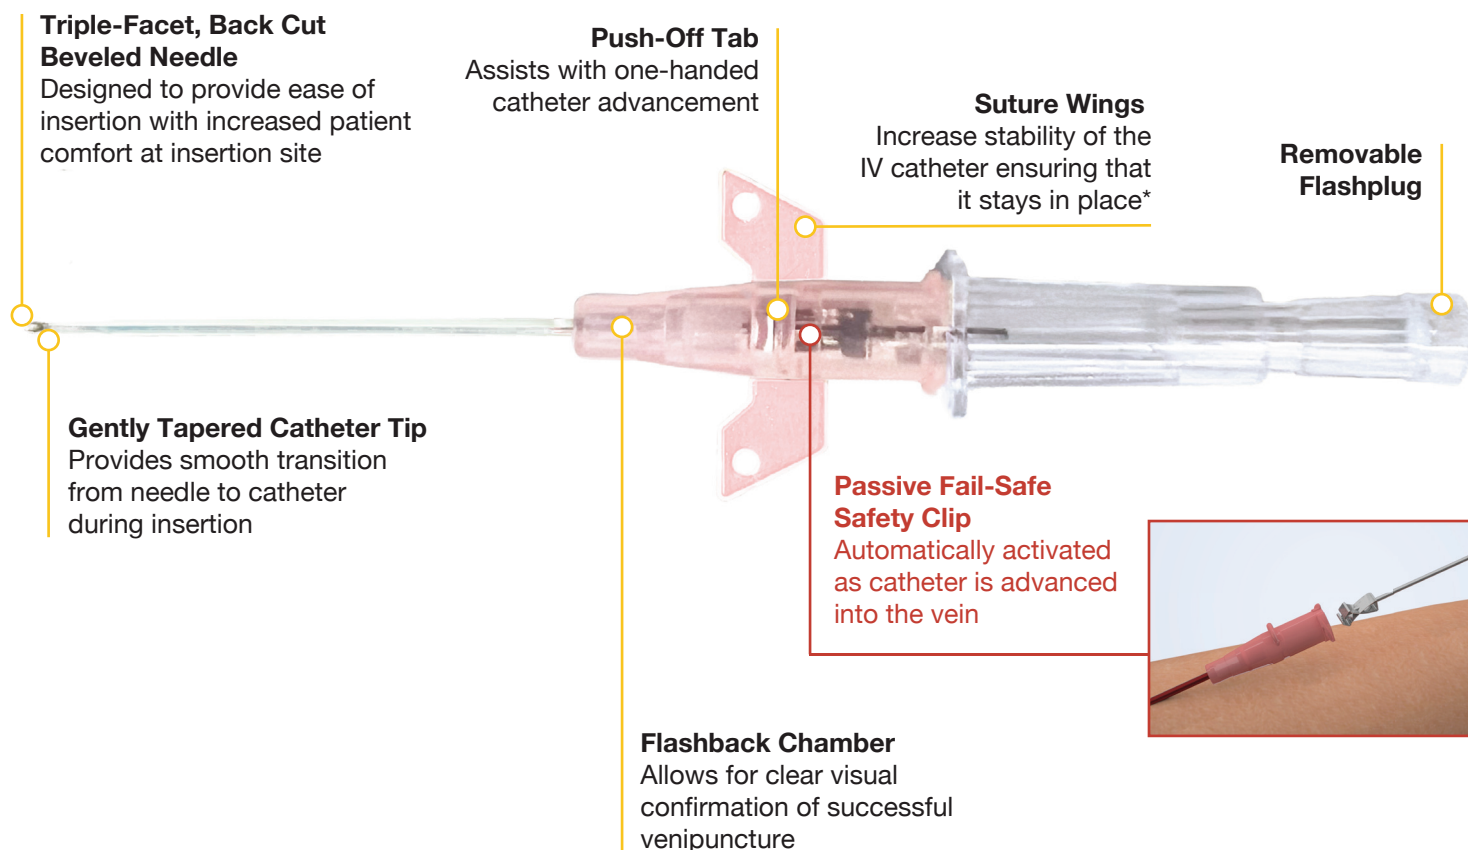

Available in select regions only
*when used with securement device

- PUR catheter material
- Disposable
- Passive style safety mechanism
- Ground stainless-steel needle

- Not made with natural rubber latex
- Not made with DEHP
- Non-pyrogenic
- Sterilized with ethylene oxide

- ISO compliant color coding
- Needlestick Safety and Prevention Act (NSPA) of 2000 compliant
- Radiopaque

PUR MATERIAL

Item #	Gauge Size	Length In Inches	Length In mm	Catheter ID (mm)	Catheter OD (mm)	Gravity Flow Rate (mL/min)	UOM
MS-89114W	14G	1.25"	32mm	1.6mm	2.1mm	297mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-89116W	16G	1.25"	32mm	1.38mm	1.8mm	220mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-89118W	18G	1.75"	45 mm	0.95mm	1.3mm	94mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-89120W	20G	1.25"	32 mm	0.78mm	1.1mm	61mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-89122W	22G	1"	25 mm	0.62mm	0.9mm	36mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS
MS-89124W	24G	0.75"	19 mm	0.49mm	0.7mm	20mL/min	EA, 50 EA/BX, 4 BX/CS, 200 EA/CS